

CONTINUOUS DISC DRYER KDM

Made of quality stainless and carbon steels or their combination

Heating surface 20 - 500 m²

Easy serviceability thanks to sophisticated design

Spare parts and consumables for the entire service life

Wide range of accessories

Repair and support services

Tradition and long **experience** in the industry

Made in the Czech Republic from high quality European materials



Application:

- animal by-products (offal, blood, fat tissue, bones, skin, fish parts, etc.)
- larvae from insect protein farms
- gastro waste from restaurants and supermarkets
- industrial sewage sludge and other raw materials containing water





Services:

We can help complete your project from the first plans all the way through to commissioning.

Our support is at your disposal for the entire machine's lifetime. Design

22 Training


□ Repairs


+ Extended WARRANTY

Spare parts

Q Inspections

Standard dimensions of the continuous disc dryer KDM:

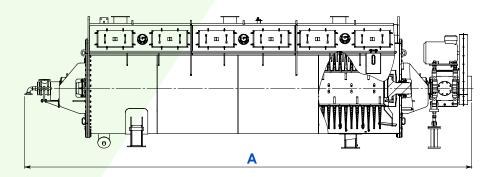




Parameter	Unit	KDM 20	KDM 50	KDM 100	KDM 200	KDM 300	KDM 450
Heating surface	m^2	20	50	100	200	300	450
Motor power	kW	15	30	45 - 55	55 - 90	90 - 110	130 - 200
Weight	kg	6 200	15 000	25 000	45 500	60 500	92 000
Length (A)	mm	5 000	6 000	8 000	10 700	12 400	13 000
Width (B)	mm	1 200	1 650	1 700	2 300	2 400	2 800
Height (C)	mm	1 900	2 500	2 500	2 800	3 300	4 000

Comprehensive solutions MONTS

We have equipment for every part of the production process.

We also supply piping, supporting structures and other accessories. Learn more

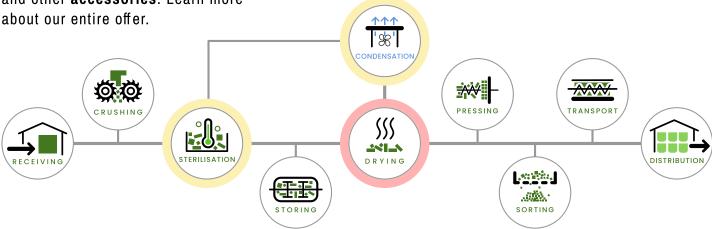



Vazni 1147 500 03 Hradec Kralove Czech Republic

VAT ID: CZ25949969 DataID: 373vWymt

